

A

03/30/98
Jc494 U.S. PTO

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Priority Application Serial No.08/209,166
Priority Filing Date3/10/94
Inventor..... Michael B. Robin
Applicant Microsoft Corporation
Priority Group Art Unit2774
Priority Examiner K. Chang
Attorney's Docket No.MS1-206USC1
Title: Apparatus and Method For Automatically Positioning A Cursor On A
Control

DIVISIONAL PATENT APPLICATION TRANSMITTAL

To: Commissioner of Patents and Trademarks,
Washington, D.C. 20231

From: Daniel L. Hayes (Tel. 509-324-9256; Fax 509-323-8979)
Lee & Hayes, PLLC
W. 201 North River Drive, Suite 430
Spokane, WA 99201

The following enumerated items accompany this transmittal letter and are being submitted for the matter identified in the above caption.

1. Transmittal Letter with Certificate of Mailing included.
2. PTO Return Postcard Receipt
3. Divisional patent application (title page plus 27 pages, including 4 claims & Abstract)
4. Copy of Executed Declaration from prior application
5. 11 sheets of formal drawings (Figs. 1-11)
6. Copy of Power of Attorney and Revocation of Previous Power of Attorney
7. Information Disclosure Statement
8. Check in the amount of \$790 (Filing Fee)

Large Entity Status ☒ Small Entity Status ☐

1 The Commissioner is hereby authorized to charge payment of fees or credit
2 overpayments to Deposit Account No. 12-0769 in connection with any patent application
3 processing fees under 37 CFR 1.17; and any additional filing fees under 37 CFR 1.16 for
4 the presentation of extra claims.

5 Date: 3/30/98

6 By: Daniel L. Hayes
Daniel L. Hayes
Reg. No. 34,618

7 **CERTIFICATE OF MAILING**

8 I hereby certify that the items listed above as enclosed are being deposited with the
9 U.S. Postal Service as either first class mail, or Express Mail if the blank for Express
10 Mail No. is completed below, in an envelope addressed to The Commissioner of Patents
11 and Trademarks, Washington, D.C. 20231, on the below-indicated date. Any Express
12 Mail No. has also been marked on the listed items.

13 Express Mail No. (if applicable) EMD 44522589

14 Date: March 30, 1998

15 By: Helen M. Hare
Helen M. Hare

APPARATUS AND METHOD FOR AUTOMATICALLY POSITIONING A CURSOR ON A CONTROL

ATTORNEY'S DOCKET NO. MS1-206USC1

1 **RELATED APPLICATIONS**

2 This is a divisional of U.S. Patent Application Serial No. 08/209,166, filed
3 March 10, 1994, which is now U.S. Patent No._____.

4 **TECHNICAL FIELD**

5 The present invention relates to the field of computer-controlled displays
6 and, more particularly, to an apparatus and method for designating control
7 groupings and automatically positioning a cursor on a control.

8
9 **BACKGROUND OF THE INVENTION**

10 Computer-controlled displays are currently in widespread use in both home
11 and business environments. Moreover, due to the price drop of microprocessors in
12 recent years, computer-controlled displays are being used in environments other
13 than conventional personal computers. For example, computer-controlled displays
14 are often used in home entertainment systems (*e.g.*, VCRs, video games or other
15 types of interactive television systems). However, because these systems typically
16 lack both sophisticated pointing devices and full-size keyboards, cursor control is
17 problematic. Cursor control refers to the ability of a user to move a cursor to a
18 specified location on the computer-controlled display. The term "cursor" as used
19 herein includes any form of movable marker such as an arrow, a screen highlight,
20 a screen focus, or the like.

21 Figure 1 illustrates a computer system 105 of a typical home entertainment
22 device. Typically, the home entertainment device features a computer 110, an
23 input device 120, and a video display device 170. Additionally, the computer 110
24 contains a receiver 130, a memory 140, a central processing unit (CPU) 150, and a
25 display driver 160. These components are interconnected as shown.

00000000-00000000

1 The input device 120 includes a directional control device 122 (e.g., a
2 joystick, an arrow keypad, a mouse) and a control switch 124 (e.g., an action
3 button, a function button, or a mouse click-button). By actuating the directional
4 control device 122, a user can move a cursor 172 on the screen of the video
5 display device 170. Similarly, by releasing the directional control device 122, the
6 user terminates cursor movement. The phrase "releasing the directional control
7 device" as used herein refers to any process for deactivating a directional control
8 device 122, so that the directional control device 122 no longer effects cursor
9 movement. The screen of the video display device is logically divided into
10 discrete points. Each discrete point is addressable by Cartesian coordinates (X,
11 Y). The screen of the video display device 170 displays a number of controls 174.
12 Each control 174 is a child window that occupies a defined area of the video
13 display device 170 and is used to input instructions to a computer program 142
14 running on the computer system 110. Typically, the computer program 142 is
15 contained within the memory 140 of the computer system 110. Generally, the
16 controls are maintained in one of two states, (1) active (indicating that an option
17 represented by the control 174 is currently available to the user), or (2) inactive
18 (indicating that an option represented by the control 174 is currently unavailable to
19 the user).

20 Typically, a software programmer decides which controls of a given
21 window should be active or inactive, depending upon the state of the program.
22 For example, in the VCR Programming Options Window 205 of Figure 2A, the
23 controls 220, 222 and 224 with double borders are active while the controls 230,
24 232 and 234 with the single borders are inactive. In this case, the Play
25 control 230, Fast Forward control 232 and Rewind control 234 are inactive due to

1 the "ON" status of the Timer ON/OFF control 220. In conventional systems, the
2 software programmer has to individually activate or deactivate a given control. To
3 disable only a fraction of the currently active controls, the programmer selectively
4 deactivates each of the controls. Such selective deactivation is cumbersome.

5 To invoke an option represented by an activated control, the user positions
6 the cursor 172 on the desired activated control and actuates the control switch 124.
7 By actuating the control switch 124 (*e.g.*, by depressing an action button), the user
8 directs the computer program 142 to execute the desired option. However, as
9 previously discussed, most home entertainment systems do not have a
10 sophisticated pointing device (such as a mouse) for a directional control device
11 122. Instead, the directional control device 122 is frequently a joy stick or a
12 simple four-directional control device. As a result, positioning the cursor 172 on
13 the desired control 172 is a difficult process for the user.

14 In conventional systems, positioning the cursor is accomplished by
15 "tabbing" or "free-roaming." When tabbing is used, the computer system 110
16 maintains a hard-wired list of the controls 174. The hard-wired list of controls
17 designates the sequence in which the user must traverse through the activated
18 controls. As previously explained, Figure 2A illustrates the Timer ON/OFF
19 control 220, the Timer Set control 222, and the Set Clock control 224 as active,
20 while illustrating the Play control 230, the Fast Forward control 232 and the
21 Rewind control 234 as inactive. Thus, in order for a user to access the Set Clock
22 control 224, the user must tab through the Timer ON/OFF control 220, and Timer
23 Set control 222 before reaching the Set Clock control 224. As a result, the
24 conventional process of tabbing is inflexible and is highly frustrating if the user
25 accidentally tabs over a desired control.

1 "Free-roaming" is also a frustrating process when a crude positioning
2 device is used. In free roaming, the user moves the cursor towards a desired
3 control using the directional control device 122. However, because the directional
4 control device 122 is typically a crude positioning device, the actual process of
5 positioning the cursor on a control is difficult. For example, it is not uncommon
6 for the user to over-shoot or under-shoot the desired control before finally placing
7 the cursor on the desired location. Thus, neither tabbing nor free-roaming provide
8 a desirable technique to position a cursor on a desired control of a computer-
9 controlled display.

10 Positioning a cursor in conventional systems has a further complication.
11 This complication arises because active controls frequently become obscured by
12 subsequently displayed items. For example, the Set Time Window 250 of Figure
13 2B obscures all the active controls 260 (shown in phantom form) of the VCR
14 Programming Options Window 205. Under these conditions, conventional
15 systems allow the user to activate the obscured controls 260 as well as the
16 unobscured controls 251, 252, 253 and 254. Such an occurrence is undesirable as
17 the user can inadvertently activate one of the obscured controls.

18 19 **SUMMARY OF THE INVENTION**

20 The preferred embodiment of the present invention is a control manager for
21 activating and deactivating controls as well as positioning a cursor on an ideal
22 control. In its preferred embodiment, the present invention allows a programmer
23 to quickly and easily activate and deactivate controls by designating a plurality of
24 controls as a "control grouping." Subsequently, the preferred embodiment of the
25 present invention designates an identifier for the entire control grouping. The

1 preferred embodiment of the present invention then quickly activates and
2 deactivates the entire grouping by toggling a state of the identifier.

3 In the preferred embodiment of the present invention, the user navigates
4 around a screen of a computer-controlled video display device by actuating a
5 directional control device. Upon releasing the directional control device, the
6 preferred embodiment of the present invention automatically positions the cursor
7 on an ideal control. The preferred embodiment determines the ideal control by
8 examining the state of an application program and the last actions of the user.
9 More specifically, for each active control, the preferred embodiment determines if
10 the control is (1) obscured by a subsequently displayed item or (2) positioned at a
11 location that the application program has specified as invalid.

12 The preferred embodiment determines if the control is obscured by a
13 subsequent item of data by comparing a registrant identifier with a current
14 identifier. The registrant identifier identifies a portion of an application program
15 that registered the control with the control manager. The current identifier
16 identifies the entity (*i.e.*, the portion of the application that registered the control)
17 that currently surrounds the Cartesian coordinates that define the control. For
18 brevity, the Cartesian coordinates that define the control will be referred to as the
19 "control position." If the registrant identifier does not match the current identifier,
20 the preferred embodiment recognizes that the control is obscured. The preferred
21 embodiment implicitly designates all obscured controls as controls which do not
22 constitute a valid resting position for the cursor.

23 The preferred embodiment determines if a control is positioned at a
24 location that the application program has specified as invalid by comparing a last
25 cursor position with the control position. The last cursor position is defined by the

1 Cartesian coordinates that the cursor pointed to when the user released the
2 directional control device. The preferred embodiment then calculates a Control
3 Distance and a Control Angle. The Control Distance is the absolute distance of a
4 control path: the control path being a path which connects the last cursor position
5 with the control position. The Control Angle is the angle formed between the
6 control path and a Last Direction of Cursor Movement Path. The preferred
7 embodiment compares the calculated Control Distance and Control Angle Values
8 with respective Skip Distance and Skip Angle Values. These skip distance and
9 skip angle values are specified by the application program. Subsequently, the
10 preferred embodiment does not consider any control which has either a calculated
11 Control Distance or Control Angle which is greater than the respective Skip
12 Distance or Skip Angle.

13 At this point, the preferred embodiment calculates a weighted distance for
14 each remaining control. Each weighted distance is calculated as a function of the
15 Control Distance, the Control Angle, and an Angle Importance Weight. More
16 specifically, the Weighted Distance is directly proportional to both the Control
17 Distance and the Control Angle. Additionally, as the Angle Importance Weight
18 increases, the effect given to the Control Angle in the Weighted Distance
19 calculation is diminished while the effect given to the Control Distance is
20 increased. After completing a Weighted Distance calculation for each remaining
21 control, the preferred embodiment of the present invention positions the cursor on
22 the control having the smallest Weighted Distance. In this manner, the preferred
23 embodiment of the present invention automatically positions the cursor on the
24 ideal activated control.

1 **BRIEF DESCRIPTION OF THE DRAWINGS**

2 Figure 1 is a block diagram of a conventional computer system.

3 Figure 2A illustrates a plurality of controls that are displayed on the video
4 display device of Figure 1.

5 Figure 2B illustrates the plurality of controls of Figure 2A after they have
6 been obscured by a subsequently displayed item of data.

7 Figure 3 is a block diagram of a computer system for practicing the
8 preferred embodiment of the present invention.

9 Figure 4 illustrates a control position and status data structure for use in the
10 preferred embodiment of the present invention.

11 Figure 5 is a functional block diagram illustrating the main functional
12 components of the preferred embodiment of the present invention.

13 Figure 6 is a flow diagram illustrating an overview of the steps performed
14 in the preferred embodiment of the present invention.

15 Figure 7A illustrates the steps performed in a process of activating and
16 deactivating control groupings in the preferred embodiment of the present
17 invention.

18 Figure 7B illustrates the steps performed in a process of positioning a
19 cursor in the preferred embodiment of the present invention.

20 Figure 8 is a flow diagram illustrating the steps performed in the steps
21 performed in a process for registering controls in the preferred embodiment of the
22 present invention.

23 Figure 9 is a flow diagram illustrating the steps performed in a process for
24 activating and inactivating hot spots in the preferred embodiment of the present
25 invention.

1 Figure 10 is a flow diagram illustrating the steps performed in a process for
2 positioning a cursor in the preferred embodiment of the present invention.

3 Figure 11 is a flow diagram illustrating the steps performed in a process for
4 determining the ideal control upon which to position the cursor.

5 **DETAILED DESCRIPTION**

6 The preferred embodiment allows the user to initiate cursor movement by
7 actuating a directional control device. When the user releases the directional
8 control device, the preferred embodiment determines the position on the screen
9 that the cursor is pointing to. Subsequently, the preferred embodiment
10 automatically moves the cursor from the determined position to an ideal control.
11 In this manner, the preferred embodiment allows the user to quickly jump to a
12 desired control without forcing the user to actually navigate the cursor over the
13 desired control cursor in this fashion. Such positioning is particularly
14 advantageous when the user has access only to a crude positioning device (*e.g.*, a
15 joystick or an arrow keypad). Additionally, by permitting a programmer to
16 designate a plurality of controls as a single control grouping, the preferred
17 embodiment allows an application program to quickly activate and deactivate a
18 selected number of the controls. Such selective activation and deactivation saves
19 the application programmer from making repetitive calls to a control manager.
20 Furthermore, the preferred embodiment provides a convenient method and
21 apparatus for prohibiting access to controls that are covered by subsequently
22 displayed windows or other items of data. More specifically, for each point which
23 defines a registered control, the preferred embodiment compares a registrant
24 identifier with a current identifier. In this manner, the preferred embodiment
25 determines if a control has been obscured by a subsequently displayed item of

1 data. Each of these facets of the preferred embodiment of the present invent will
2 be explained in detail below.

3 Figure 3 is a block diagram of a computer system 305 for practicing the
4 preferred embodiment of the present invention. The computer system 305 features
5 a computer 310, an input device 320, and a video display device 370. The
6 computer 310 contains a receiver 330, a main memory 340, a central processing
7 unit (CPU) 350, and a display driver 360. These components are interconnected
8 as shown.

9 The input device 320 includes a directional control device 322. In Figure 3,
10 the directional control device 322 is shown as a four-arrow keypad. However,
11 those skilled in the art will appreciate that the present invention is suitable for use
12 with any type of directional control device (*e.g.*, a mouse, a joystick). The
13 directional control device 322 is used to position a cursor 372 on a control 374 of
14 the video display device 370. Once the cursor is positioned on a control, a user
15 may invoke the option represented by the control by depressing a function button
16 324. As will be explained below, in the preferred embodiment of the present
17 invention application programs (346 and 348) register controls with a control
18 manager 345. In brief, the process of registering a control with the control
19 manager 345 includes informing the control manager 345 of the desired location
20 and status information for the control. Subsequently, the control manager 345
21 activates and deactivates controls 374 and positions the cursor 372 among the
22 controls 374. In Figure 3, both the control manager 345 and the application
23 programs (346 and 348) are shown as part of the main memory 440. However,
24 those skilled in the art will appreciate that the control manager 345 may be located
25

1 in other areas of the computer system (e.g., in the device driver 360) without
2 departing from the spirit and scope of the present invention.

3 Figure 4 illustrates a data structure 400, associated with an application
4 program. As will be explained below, the preferred embodiment of the present
5 invention maintains this data structure to determine the ideal control of the
6 application program. Those skilled in the art will appreciate that the data structure
7 of Figure 4 represents only one of many possible methods for storing the data
8 explained below. For example, instead of storing the data in an array format as
9 illustrated in Figure 4, the data may be stored in a linked-list structure or stored in
10 separate fields which are not aggregated together. For convenience, the data
11 structure 400 of Figure 4 illustrates the data used by the preferred embodiment of
12 the present invention in a single cohesive grouping. This format was chosen to
13 enhance the readability of the detailed description. As such, the format in which
14 the data is presented in Figure 4 should not be used to limit the scope of the
15 invention.

16 The data structure 400 is used for managing the activation of controls 374
17 and positioning the cursor 372 on a control 374. The data structure includes a
18 Control Word 405 for quickly activating and deactivating groupings of controls.
19 The Control Word 405 includes a number of Control Grouping Indicators 406.
20 Each Control Grouping Indicator 406 defines the status (active or inactive) for a
21 number of aggregated controls. This number of aggregated controls is referred to
22 as a control group. Additionally, the data structure includes three parameters
23 which are specified by an application program 346: a Skip Angle Parameter 410,
24 a Skip Distance Parameter 420, and an Angle Importance Weight Parameter 430.
25 As will be explained below, the control manager 345 utilizes these three

1 parameters to determine an ideal control 374 upon which to position the cursor
2 372. The data structure also includes a Control Position and Status Indicator 440
3 (CPSI) for each control. Each CPSI contains: (1) a Position Identifier 441 for
4 identifying a position of a control on the screen (*e.g.*, a set of Cartesian
5 coordinates representing the control); (2) a Registrant Identifier 442 for identifying
6 the entity which registered the control (*e.g.*, a window handle identifying a
7 registering window); (3) an Active Flag 443 for indicating an active/inactive state
8 of the control; and (4) Control Group Identifiers 444 for identifying a membership
9 of the control in one or more control groups.

10 As will be explained below, the control manager 345 inputs, from
11 application programs 346 and 348, values for; the Control Word 405, the Skip
12 Angle Parameter 410, the Skip Distance Parameter 420, the Angle Importance
13 Weight Parameter 430, the Position Identifier 441, and the Registrant Identifier
14 442. The preferred embodiment of the present invention then uses these inputted
15 values to dynamically maintain the remaining contents of each CPSI (*e.g.*, the
16 Active Flag 443 and the Control Group Identifiers 444).

17 Figure 5 is a functional block diagram illustrating the main software
18 processes of the preferred embodiment of the present invention. The preferred
19 embodiment of the present invention registers controls (block 501) by
20 (1) inputting positioning information, a registrant identifier, and control group
21 numbers from an application program 346 (block 502) and (2) storing the inputted
22 data in the respective fields of a CPSI 440 (block 503). Similarly, the preferred
23 embodiment activates and deactivates controls (block 510) by (1) inputting control
24 information (block 511) and updating the Active Flags 443 of the CPSI
25 accordingly (block 512). More specifically, the preferred embodiment may either

1 (1) activate/deactivate individual controls by inputting individual control
2 identifiers and active/inactive status information (block 513), or
3 (2) activate/deactivate an entire control grouping by inputting a mask and
4 superimposing the mask into the Control Word 405 (block 514). As will be
5 explained below in reference to Figure 9, this mask is a grouping of binary
6 numbers which are used to selectively set or reset the Control Grouping Indicators
7 406.

8 The preferred embodiment of the present invention positions the cursor on
9 an ideal control (block 515) by removing from consideration any controls that are
10 (1) obscured by subsequently displayed items of data (block 517), or
11 (2) positioned at distances or angles which, relative to the cursor's position and
12 path, are greater than respective application-defined maximum values (blocks 518
13 and 519). The preferred embodiment calculates a Weighted Distance for each
14 control which is not removed from consideration. The preferred embodiment
15 calculates the Weighted Distance by first identifying a Last Direction of Cursor
16 Movement Path and a Last Cursor Position. The Last Direction of Cursor
17 Movement Path defines the direction that the user was moving the cursor 372
18 immediately before the user released the directional control 322. Similarly, the
19 Last Cursor Position defines the Cartesian coordinates of a cursor pointer when the
20 user released the directional control 322.

21 Having identified the Last Direction of Cursor Movement Path and the Last
22 Cursor Position, the preferred embodiment then calculates the Weighted Distance
23 for the control as a function of that control's Control Distance and Control Angle.
24 As stated above, a control's Control Distance is the distance that connects the Last
25 Cursor Position with the Control Position. The line which defines the Control

Distance is referred to as the Control Path. Since both the Last Cursor Position and the Control Position are typically related by Cartesian coordinates, the Control Distance can be calculated in a straightforward manner (*e.g.*, via a Euclidean or manhattan distance calculation). A control's Control Angle is the angle formed between the Last Direction of Cursor Movement Path and the Control Path. Generally, the Weighted Distance of a control is directly proportional to both the Control Angle and the Control Distance. Additionally, the preferred embodiment allows the user to selectively minimize or maximize the effect given to either the Control Angle or the Control Distance by varying the previously described Angle Importance Weight 430. As will be appreciated by those skilled in the art, a variety of formulae for calculating the weighted distance of a control may be implemented without departing from the spirit or scope of the present invention. One example is the following formula which is used in the preferred embodiment of the present invention:

$$\text{WeightedDistance} = \text{ControlDistance} + \frac{\text{ControlAngle} * \text{Control Distance}}{\text{AngleImportance Value}}$$

After calculating Weighted Distances for each control, the preferred embodiment of the present invention positions the cursor on the control with the smallest associated Weighted Distance (block 521).

Having described an overview of the preferred embodiment of the present invention, the respective components of the preferred embodiment will now be explained in detail. The detailed discussion to follow illustrates the preferred embodiment as it is incorporated in an interactive television system. In this

1 example, the input device 320 of Figure 3 is a remote control and the directional
2 control device 322 is assumed to be a four-directional arrow keypad.
3 Additionally, in this example, the computer 310 is a VCR and the video display
4 device 370 is a television. However, the present invention is not limited to any
5 particular directional control device 322, computer system 310, or video display
6 device 370.

7 Figure 6 shows an overview of the steps performed by the control manager.
8 In order for the preferred embodiment to direct processing control along a "YES"
9 path of a decision step (*e.g.*, step 610, 630, 660, or 680), the preferred embodiment
10 must determine that the application program has requested the corresponding
11 action. Typically, the application program 346 notifies the Control Manager
12 Program that a given action is desired. As will be appreciated by those skilled in
13 the art, such notification may be accomplished in any one of a number of ways
14 (*e.g.*, setting a request flag, calling components of Figure 6 directly, or a hardware
15 interrupt). The actual means of notification does not comprise a limit on the
16 present invention.

17 The preferred embodiment begins processing by determining if the
18 application program requests to register controls (step 610). The example assumes
19 that a VCR user has just activated a VCR Options Program 346 by depressing a
20 VCR programming option switch on the VCR remote control device. As such, the
21 VCR Options Program 346 generates a VCR Programming Options Window 705
22 of Figure 7A on the video display device 370. Figure 7A illustrates controls in an
23 identical manner to that previously illustrated in regards to conventional systems
24 (Figure 2A). However, as will be explained below the preferred embodiment of
25 the present invention discloses a novel technique for activating and deactivating

1 the controls of Figure 7A. After generating the window, the VCR Options
2 Program 346 registers each control (720, 722, 724, 730, 732 and 734) in the VCR
3 programming window 705 with the control manager 345 (step 620).

4 The Register Control Program of Figure 8 accepts controls from an
5 application program 346 and registers them in the data structure 400. The Register
6 Control Program begins by determining if the application program has an
7 additional control to register (step 810). If the application program has an
8 additional control to register, the preferred embodiment inputs the respective
9 control data (step 820). In the example, the preferred embodiment of the present
10 invention inputs control data for the controls (720, 722, 724, 730, 732 and 734) of
11 the VCR Options Program 346 (step 820). The preferred embodiment then
12 registers the controls by storing the inputted control data in the previously
13 described CPSIs 440 (step 830). More specifically, for each control, the preferred
14 embodiment stores a set of Cartesian coordinates which identifies the center of the
15 control in a respective Position Identifier 441. Additionally, the preferred
16 embodiment stores a window handle for each control in the respective Registrant
17 Identifiers 442. A window handle is a numerical identifier that identifies the
18 registering window (*i.e.*, the VCR Programming Options Window 705). By
19 default, the preferred embodiment also sets the Active Flag 443 for each newly
20 registered control. However, the application program 346 can request that this
21 flag be initially reset.. Furthermore, the preferred embodiment stores control
22 group numbers for each control in respective Control Group Identifiers 444.
23 These group numbers indicate the control groupings to which the controls belong.
24 As will be explained below, the application may designate a control to be
25 considered as an element of a control grouping at any time. For purposes of

example, assume that the VCR Options Program 346 specifies that the Timer ON/OFF control 720, the Timer Set control 722, and the Clock Set control 724, all belong to a first grouping of controls and the Play control 730, the Fast Forward control 732, and the Rewind control 734, all belong to a second grouping of controls. As a result, the Register Controls Program updates the CPSIs 440 to reflect the membership of the controls in their respective groups. In the example, the preferred embodiment of the present invention stores either a one or a two in the Control Group Identifier 444 of each control depending on whether the associated control belongs to the respective first or second grouping. After inputting and storing this data for each control, the Register Control Program of Figure 8 returns to the Control Manager Program of Figure 6.

The Control Manager Program of Figure 6 continues processing by determining if the VCR Options Program 346 has requested to set or modify the parameters used in the Weighted Distance calculation (*i.e.*, the Skip Angle Value 410, the Skip Distance Value 420, and the Angle Importance Weight 430) (step 630). By varying values for these parameters, an application programmer informs the control manager 345 how to determine an ideal resting position for the cursor 372. For example, since the preferred embodiment uses

$$\text{Weighted Distance} = \text{Control Distance} + \frac{\text{Control Angle} * \text{Control Distance}}{\text{Angle Importance Value}}$$

to calculate weighted distances, an application programmer can direct the control manager 345 to give predominate weight to controls which lie in proximity to a Last Direction of Cursor Movement Path (as opposed to controls which are angled away from the direction of Last Direction of Cursor Movement Path) by selecting

1 a large Skip Distance Value 420, a small Skip Angle Value 410, and a large Angle
2 Importance Weight Value 430.

3 Typically, the application programmer heuristically determines values for
4 the above parameters based on the size of the window, the number of controls in
5 the window and the relative locations of the controls to each other. In this case,
6 assume that the application programmer has determined that a Skip Angle Value
7 of 175°, a Skip Distance Value of 450 units, and an Angle Importance Weight
8 Value of 100 represent ideal values for the VCR Programming Options Window
9 705. The effect of the selection of these values will be discussed in detail below
10 relative to Figures 10 and 11. Under these conditions, the preferred embodiment
11 receives the values from the VCR Options Program 346 (steps 630 and 640) and
12 stores the inputted values in their respective locations of the data structure 400
13 (step 650).

14 At this point, the Control Manager Program of Figure 6 determines if it
15 should activate or deactivate any controls (step 660). For purposes of example,
16 assume that the VCR Options Program 346 originally activated all controls of the
17 VCR Programming Options Window 205. Further assume that the user
18 subsequently set a timer of the VCR which renders normal play options (*i.e.*, play,
19 fast forward and rewind) unavailable. In this case, the unavailable options are
20 represented by the controls of the second control grouping (730, 732, and 734).
21 Under these conditions, the VCR Options Program requests deactivation of the
22 second control grouping. As a result, the Control Manager Program transfers
23 control to the Activate/Deactivate Control Program of Figure 9 (step 670).

24 The Activate/Deactivate Control Program of Figure 9 activates or
25 deactivates controls as requested by the application program. The

1 Activate/Deactivate Control Program expects a mask as input if the application
2 program 346 is requesting to activate or deactivate a grouping of controls. The
3 mask is a grouping of binary numbers which are used to selectively screen out or
4 let through certain bits in the Control Word 405. As will be explained below, the
5 preferred embodiment performs a logical AND operation using the inputted mask
6 and a current value of the Control Word 405 to selectively set or reset the Control
7 Grouping Indicators 406 of the Control Word 405. Alternatively, if the
8 application program is requesting to activate or deactivate an individual control,
9 the Activate/Deactivate Control Program expects (1) control identifier (*e.g.*, a
10 CPSI array element number) and (2) an activate/deactivate flag, as input.

11 In the example, the preferred embodiment of the present invention
12 determines that the VCR Options Program 346 is requesting to activate or
13 deactivate the second control grouping (step 910). Alternatively, had the
14 application requested to activate or deactivate an individual control, the preferred
15 embodiment of the present invention (1) receives the individual control identifier
16 and the activate/deactivate flag (step 920) and (2) appropriately activates or
17 deactivates the identified control (step 930). Back to the example, the preferred
18 embodiment inputs a mask to deactivate the second control grouping (step 940).
19 For purposes of illustration, assume that the second control grouping is
20 represented by the second bit 406 of a Control Word 405 and that a null value for
21 the bit deactivates a grouping: thus, the inputted mask would appear as represented
22 by 945 in Figure 9 (*i.e.*, the last four bits of the inputted mask are 1101 or 0xD in
23 hexadecimal notation). Subsequently, the preferred embodiment of the present
24 invention superimposes the inputted mask 945 into Control Word 405 using a
25 logical AND operation (step 950) of Figure 9. Having masked the Control Word

1 405 of Figure 4, the preferred embodiment updates the Active Flag 443 of each
2 CPSI 440 in accordance with the newly masked bit values of the Control Word
3 405. In this case, the preferred embodiment resets each Active Flag 443 for each
4 CPSI having a control group number of two stored as a Control Group Identifier.
5 Having updated each relevant Active Flag 443, the Activate/Deactivate Controls
6 Program of Figure 9 returns control the Control Manager Program 6. By
7 representing a grouping of controls as a single bit of the Control Word 405, the
8 preferred embodiment of the present invention provides a convenient method for
9 an application program to activate or deactivate a fraction of its registered
10 controls. By using a mask and a control word, the preferred embodiment allows
11 the application programmer to activate/deactivate the desired fraction controls
12 with a minimum amount of coded instructions (*i.e.*, by merely loading a mask
13 value into a parameter as opposed to individually specifying each control that the
14 application programmer wants activated or deactivated). At this point, the
15 example has demonstrated how the preferred embodiment of the present invention
16 registers controls and quickly deactivates a fraction of formerly activated controls.
17 The example will now demonstrate the innovative automatic positioning technique
18 of the preferred embodiment of the present invention.

19 Figure 7B represents a display of the video display device 370 of Figure 3.
20 More specifically, Figure 7B illustrates the VCR Programming Window 705 of
21 Figure 7A after it has been obscured by the Subsequently Displayed Window 750
22 of Figure 7B. The active controls of Figure 7A are represented by the controls
23 displayed in phantom form 760 in Figure 7B. Additionally, assume that the
24 Subsequently Displayed Window 750 contains four active registered controls 751,
25 752, 753, and 754 (registered and activated in the previously described manner,

1 Figures 8 and 10). For purposes of example, assume that the user was moving the
2 cursor in a last direction of movement represented by a Last Direction of
3 Movement Path 770. Additionally, the position on the screen of the video display
4 device 370 at which the user terminated the movement of the cursor is represented
5 by 780 in Figure 7B. The Control Manager Program of Figure 6 determines that
6 the user terminated cursor movement by releasing the directional control 322 (step
7 680) and transfers control to the Position Cursor Program of Figure 11 (step 690).

8 The Position Cursor Program of Figure 10 determines the ideal control to
9 position the cursor on after the user has released a switch of the directional control
10 device 322 (*e.g.*, if the user has released a previously depressed directional arrow
11 button). In the example, the Position Cursor Program begins by determining the
12 Last Cursor Position (*e.g.*, the Cartesian coordinates for the position on the screen
13 pointed to by the cursor when the user released the directional control 322) (step
14 1010). Additionally, the Position Cursor Program determines a Last Direction of
15 Movement Path for the cursor (step 1020). Typically, both the Last Cursor
16 Position and the Last Direction of Movement Path are readily available as
17 parameters contained within the display driver 360. Having determined the point
18 of release and the Last Direction of Movement Path, the Position Cursor Program
19 calls a Determine Ideal Control Program of Figure 11 (step 1030).

20 The Determine Ideal Control Program of Figure 11 determines the optimal
21 control upon which to position the cursor. The preferred embodiment begins the
22 determination process by setting a Current Minimum Weighted Distance
23 Parameter to an arbitrarily large value (step 1105). For purposes of example,
24 assume that the Current Minimum Weighted Distance Parameter is initially set to
25 65,535. Subsequently, the preferred embodiment examines the positioning and

1 status of each control (steps 1110-1170). In the example, there are seven active
2 controls: the unobscured controls of the Subsequently Displayed Window 750 and
3 the obscured controls 760 of the VCR Programming Options Window 705. In the
4 interests of brevity, the three obscured controls 760 of window 705 will be treated
5 in a single pass of the loop formed by steps 1110 and 1120 of Figure 11. The
6 preferred embodiment of the present invention determines that controls 760 are
7 obscured by retrieving the Cartesian coordinates stored in the Position Identifier
8 441 of the CPSI. Having retrieved the Cartesian coordinates, the preferred
9 embodiment of the present invention passes the retrieved coordinates to a Get
10 Window From Point Program. In turn, the Get Window From Point Program
11 returns the active window handle that surrounds the point represented by the
12 passed center coordinate. In the example, the Get Window From Point Program
13 returns the window handle of the Subsequently Displayed Window 750. The
14 preferred embodiment then compares the subsequently displayed window handle
15 with the window handle stored as the Registrant Identifier 442 for the associated
16 control. As previously mentioned, a window handle is a unique numerical
17 identifier of a window. As such, the window handle of the VCR Programming
18 Options Window 705 does not match the window handle of the Subsequently
19 Displayed Window 750. Consequently, the preferred embodiment does not
20 consider any of the obscured controls 760 as valid resting positions for the cursor
21 (steps 1110 and 1220).

22 Subsequently, the Determine Ideal Control Program examines the AM/PM
23 control 754 of Figure 7B (steps 1110-1130 of Figure 11). In this case, however,
24 the angle formed between (1) the Last Direction of Cursor Movement Path 770
25 and (2) the AM/PM Control Path 774, is equal to 180°. As previously discussed,

1 the application programmer specified the skip angle to be 175°. Therefore, the
2 preferred embodiment does not consider the AM/PM control 754 as a valid resting
3 position for the cursor (steps 1110 and 1130 of Figure 11).

4 At this point, the Determine Ideal Control Program of Figure 11 examines
5 the Time Entry control 753 of Figure 7B. In this case, the preferred embodiment
6 determines that the associated absolute distance 793 for the Time Entry control
7 753 is equal to 500 units (step 1140). Thus, the absolute distance to the Time
8 Entry control is greater than the skip distance value of 450. As a result, the
9 Determine Ideal Control Program does not consider the Time Entry control 753 as
10 a valid resting position for the cursor.

11 Additionally, the Determine Ideal Control Program of Figure 11 examines
12 the OK control 752 and the Cancel control 751 of Figure 7B (steps 1110-1170). In
13 contrast to the previously examined controls, these two controls are neither
14 obscured or out of respective distance or angle ranges. Therefore, the preferred
15 embodiment Position calculates the weighted distance for these two remaining
16 control candidates (step 1150). More specifically, assuming that the Control
17 Angle 781 for the Cancel control 751 is equal to 20° and that the absolute distance
18 connecting the point of release 780 with the center of the Cancel control 751 is
19 300 units, the associated Weighted Distance equals 360. [Weighted distance =
20 Absolute Distance + Control Angle/Weight Angle x Absolute Distance = 300 +
21 (20*300)/100 = 360] (step 1150). Since the Cancel control has an associated
22 weighted distance which is less than the value (65,535) held in the Current
23 Minimum Weighted Distance Parameter (step 1160), the preferred embodiment
24 sets the Current Minimum Weighted Distance Parameter to the Weighted Distance
25 associated with the Cancel control 751 (step 1170). Similarly, assuming that the

associated absolute distance for the OK control 752 of Figure 7B is 400 units and the associated weight angle is 45°, the preferred embodiment calculates an associated weighted distance of 580 (steps 1110-1150). In this case, however, the calculated weighted distance is not less than the value held in the Current Minimum Weighted Distance Parameter (step 1160). Therefore, the Determine Ideal Control Program returns to the Position Cursor Program of Figure 10 with the Cancel control 751 of Figure 7B identified as the control having the smallest associated weighted distance. At this point, the Position Cursor Program positions the cursor on the Cancel control 751 (step 1140). In this manner, the preferred embodiment of the present invention automatically places a cursor on an ideal control. By determining an ideal control in this fashion, the preferred embodiment allows the user to easily navigate between controls using only a crude positioning device. For example, using either a four-arrow keypad or a joystick, the user can effectively jump to a desired control by only momentarily activating the directional control device in the direction of the desired control.

As explained above, the preferred embodiment of the present invention determines the ideal control after the user has released the directional control. However, those skilled in the art will appreciate that the preferred embodiment can be easily modified to determine the ideal control while the user is moving the cursor. In this alternative embodiment, the present invention periodically calculates the weighted distances of the controls and designates the control having the smallest weighted distance as a current ideal control. The alternative embodiment then positions the cursor on the current ideal control when the user releases the directional control device.

1 Additional advantages of, and modifications to, the preferred embodiment
2 of the present invention will readily appear to those skilled in the art. Therefore,
3 the broader aspects of the present invention are not limited to the specified details
4 of the described preferred embodiment. Accordingly, various modifications may
5 be made to the preferred embodiment without departing from the spirit and scope
6 of the present invention. As such, the present invention is only limited by the
7 appended claims and their equivalents.

8 Although the invention has been described in language specific to structural
9 features and/or methodological steps, it is to be understood that the invention
10 defined in the appended claims is not necessarily limited to the specific features or
11 steps described. Rather, the specific features and steps are disclosed as preferred
12 forms of implementing the claimed invention.

1 **CLAIMS**

2
3 1. In a computer system having a video display device, the video display
4 device having a screen, a method comprising the steps of:

5 providing a plurality of controls on the screen of the video display device;

6 identifying a control group, the control group being comprised of at least
7 two controls;

8 representing the control group with a single status indicator; and

9 directing the activation of the controls of the control group by storing an
10 active value in the single status indicator.

11
12 2. The method of claim 1 wherein the computer system further includes
13 a cursor which is displayed on the screen of the video display device, the method
14 further comprising the steps of:

15 identifying a location on the screen that the cursor points to; and

16 for each control of the control group, identifying a control position, the
17 control position defining a location on the screen for the activated control,
18 determining a control distance, the control distance defining a control connecting
19 path which connects the identified location with the control position, calculating a
20 control angle, the control angle being an angle formed between the control
21 connecting path and a last direction of cursor movement path, and calculating a
22 weighted distance.

1 3. An apparatus for activating and deactivating a control grouping, the
2 control grouping being comprised of at least two controls and being displayed on a
3 screen of a video display device of a computer system, the apparatus including:

4 a memory formed within the computer system; and

5 a control grouping identifier contained within the memory, wherein the
6 control grouping identifier has an active state and an inactive state and wherein the
7 control grouping identifier represents the controls of the control grouping.

8
9 4. The apparatus of claim 3 wherein the control grouping identifier is a
10 bit of a control word.

1 **ABSTRACT**

2 A method and apparatus for managing controls on the screen of a computer
3 controlled display. The preferred embodiment of the present invention provides
4 for quick and efficient activation and deactivation of controls by designating a
5 number of controls as a control grouping. The preferred embodiment then
6 collectively activates or deactivates the designated number of controls using an
7 identifier for the control grouping. Additionally, after a user terminates cursor
8 movement, the preferred embodiment automatically positions a cursor on an ideal
9 control. The preferred embodiment determines the ideal control (1) by removing
10 from consideration any controls which are (a) not visible to the user, or (b) located
11 at non-optimal positions on the screen, and (2) by calculating a weighted distance
12 for each remaining control. The preferred embodiment calculates the weighted
13 distances by comparing the previous cursor movements made by a user with
14 application specified parameters. After calculating a weighted distance for each
15 remaining control, the preferred embodiment automatically positions the cursor on
16 the control having a smallest associated weighted distance.

17
18
19
20
21
22
23
24
25

DECLARATION AND POWER OF ATTORNEY

As the below-named inventor, I declare that:

My residence, post office address, and citizenship are as stated below under my name.

I believe I am the original, first, and sole inventor of the invention entitled "APPARATUS AND METHOD FOR AUTOMATICALLY POSITIONING A CURSOR ON A CONTROL," which is described and claimed in the foregoing specification and for which a patent is sought.

I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment specifically referred to herein (if any).

I acknowledge my duty to disclose information of which I am aware which is material to the examination of this application in accordance with 37 C.F.R. § 1.56(a).

I hereby appoint RICHARD W. SEED, Registration No. 16,557; ROBERT J. BAYNHAM, Registration No. 22,846; EDWARD W. BULCHIS, Registration No. 26,847; GEORGE C. RONDEAU, JR., Registration No. 28,893; DAVID H. DEITS, Registration No. 28,066; WILLIAM O. FERRON, JR., Registration No. 30,633; PAUL T. MEIKLEJOHN, Registration No. 26,569; DAVID J. MAKI, Registration No. 31,392; RICHARD G. SHARKEY, Registration No. 32,629; GEORGE B. FOX, Registration No. 31,510; DAVID V. CARLSON, Registration No. 31,153; MAURICE J. PIRIO, Registration No. 33,273; KARL R. HERMANN, Registration No. 33,507; DAVID D. McMASTERS, Registration No. 33,963; ROBERT IANNUCCI, Registration No. 33,514; JOSHUA KING, Registration No. 35,570; MICHAEL J. DONOHUE, Registration No. 35,859; LORRAINE LINFORD, Registration No. 35,939; KEVIN J. CANNING, Registration No. 35,470; PATRICIA E. CHAMBERLAIN, Registration No. 37,038; CHRISTOPHER J. DALEY, Registration No. 34,807; TIMOTHY J. CREAN, Registration No. 37,116; STEVEN D. LAWRENZ, Registration No. 37,376; ROBERT G. WOOLSTON, Registration No. 37,263; MANYA S. DEEHR, Registration No. 37,120; CLARENCE T. TEGREENE, Registration No. P-37,951; and TARA A. PHILLIPS, Registration No. 35,980, composing the firm of SEED and BERRY, 6300 Columbia Center, Seattle, Washington 98104-7092, my attorneys to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. Please direct all telephone calls to George C. Rondeau, Jr. at (206) 622-4900 and telecopies to (206) 682-6031.

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true;

and further, that these statements were made with the knowledge that the making of willfully false statements and the like is punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and may jeopardize the validity of any patent issuing from this patent application.


Michael B. Robin

Date 5-17-81

Residence : City of Redmond, County of King
State of Washington

Citizenship : United States of America

P.O. Address : 12506 183rd Avenue Northeast
Redmond, Washington 98052

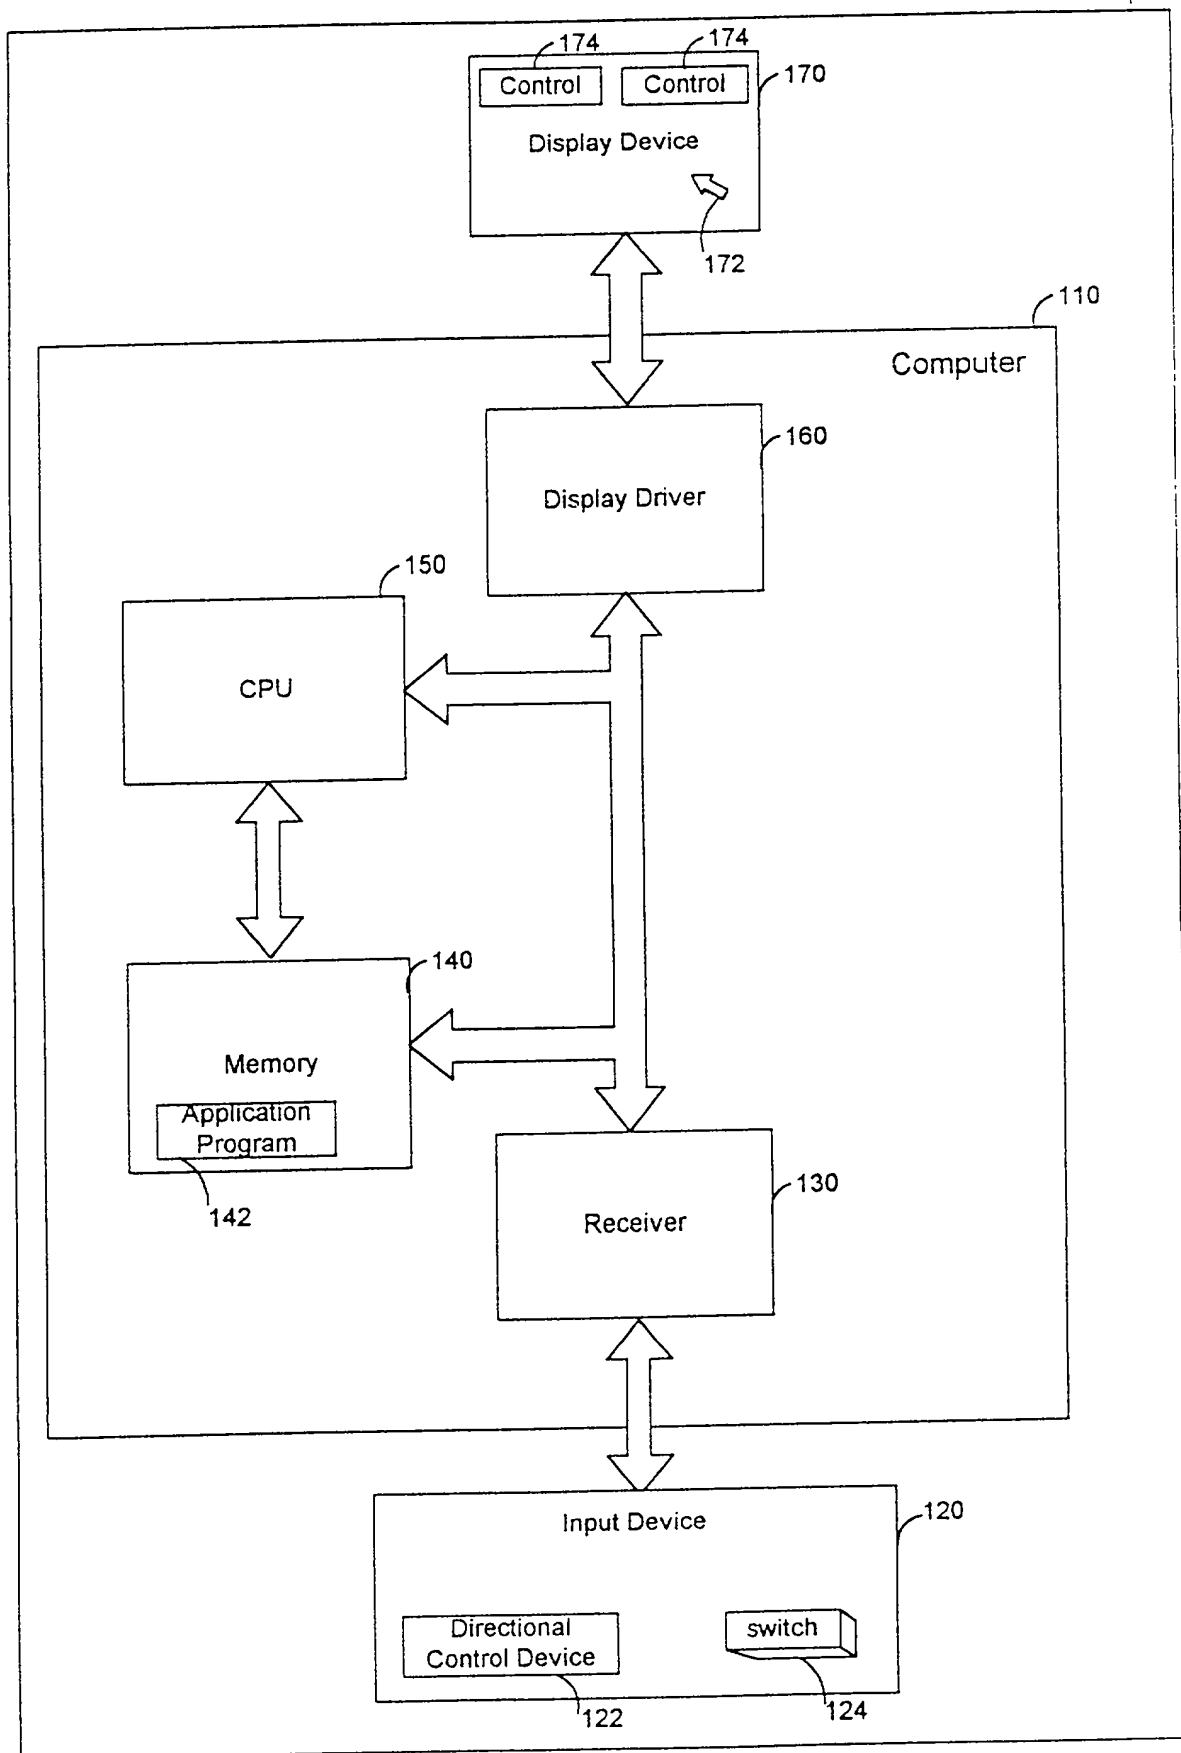

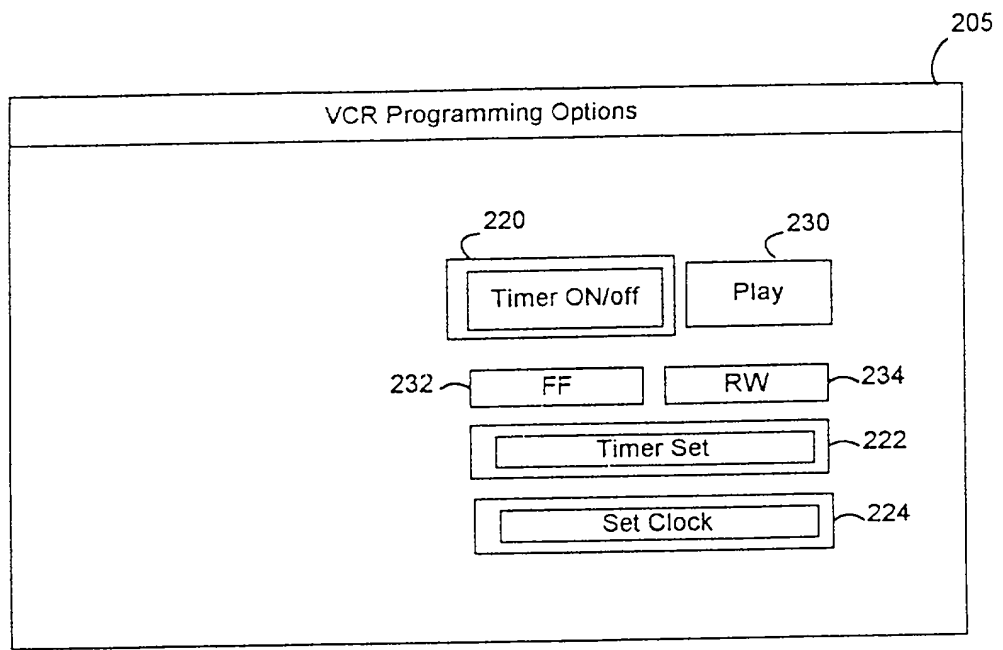


Figure 2A

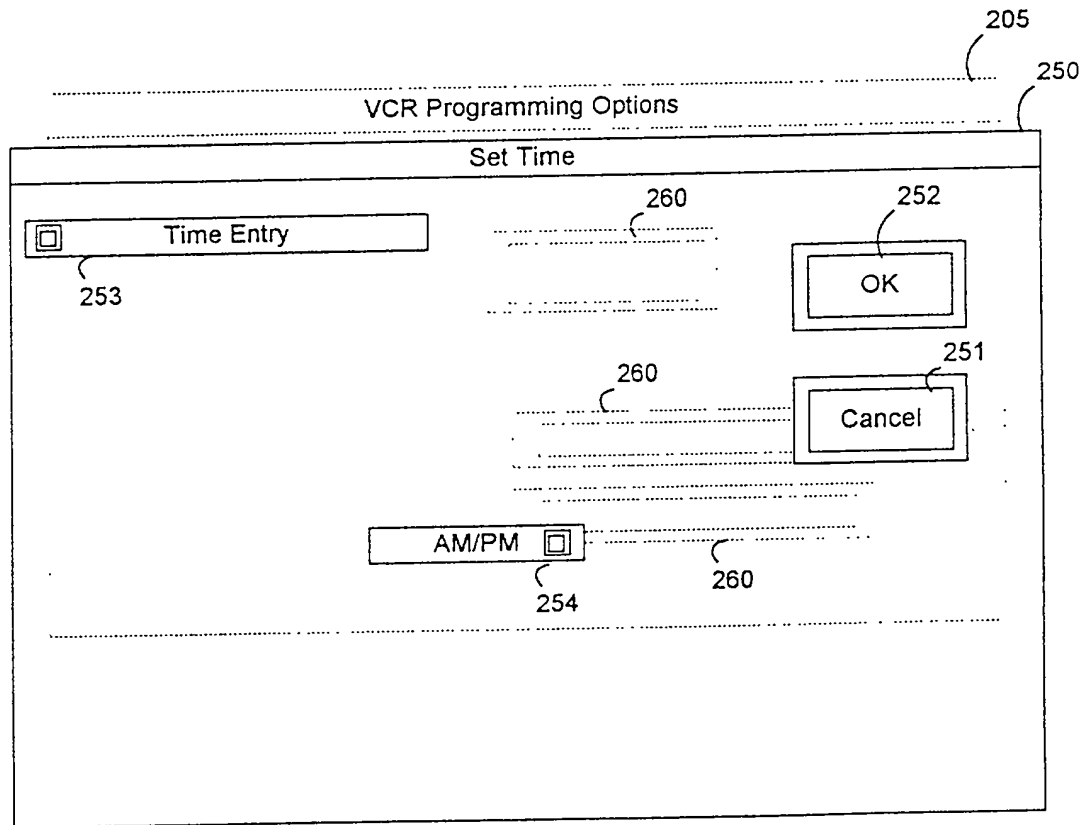


Figure 2B

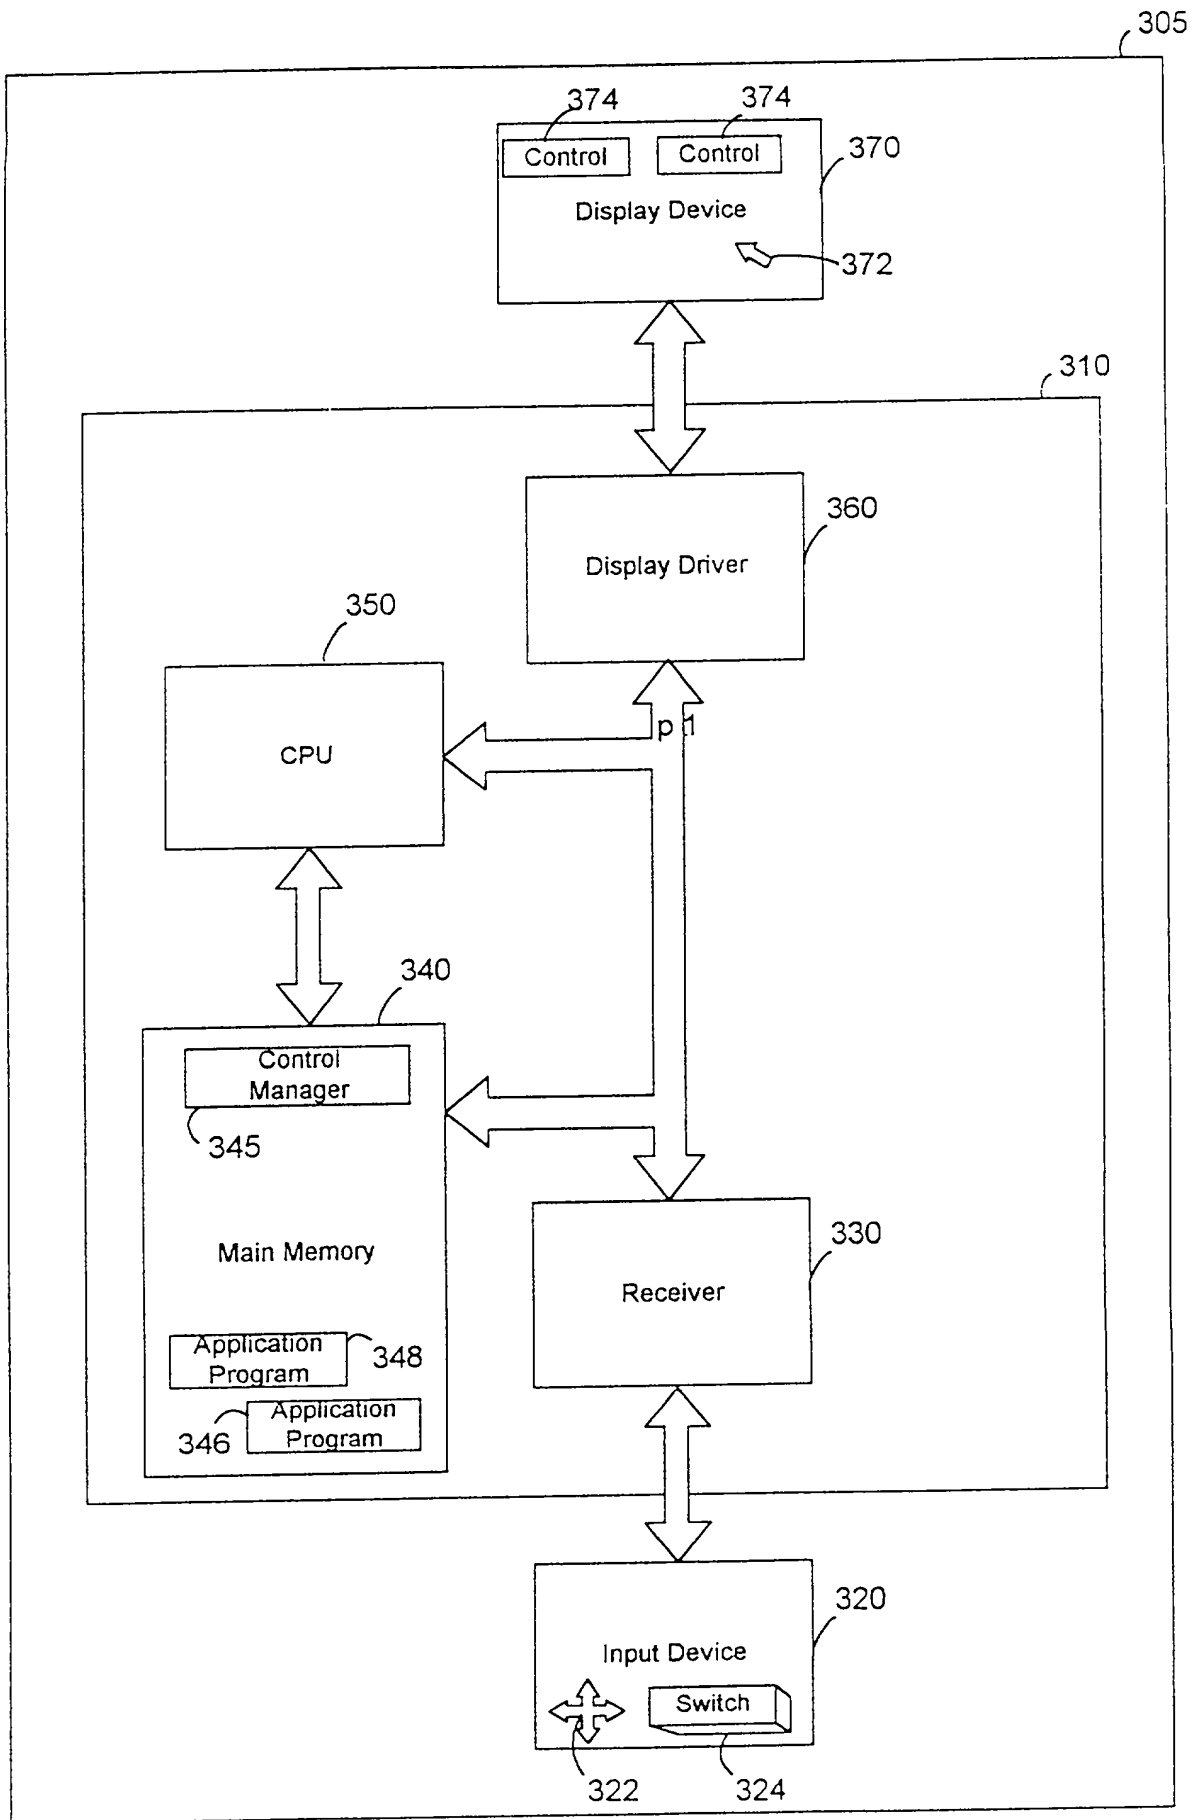


Figure 3

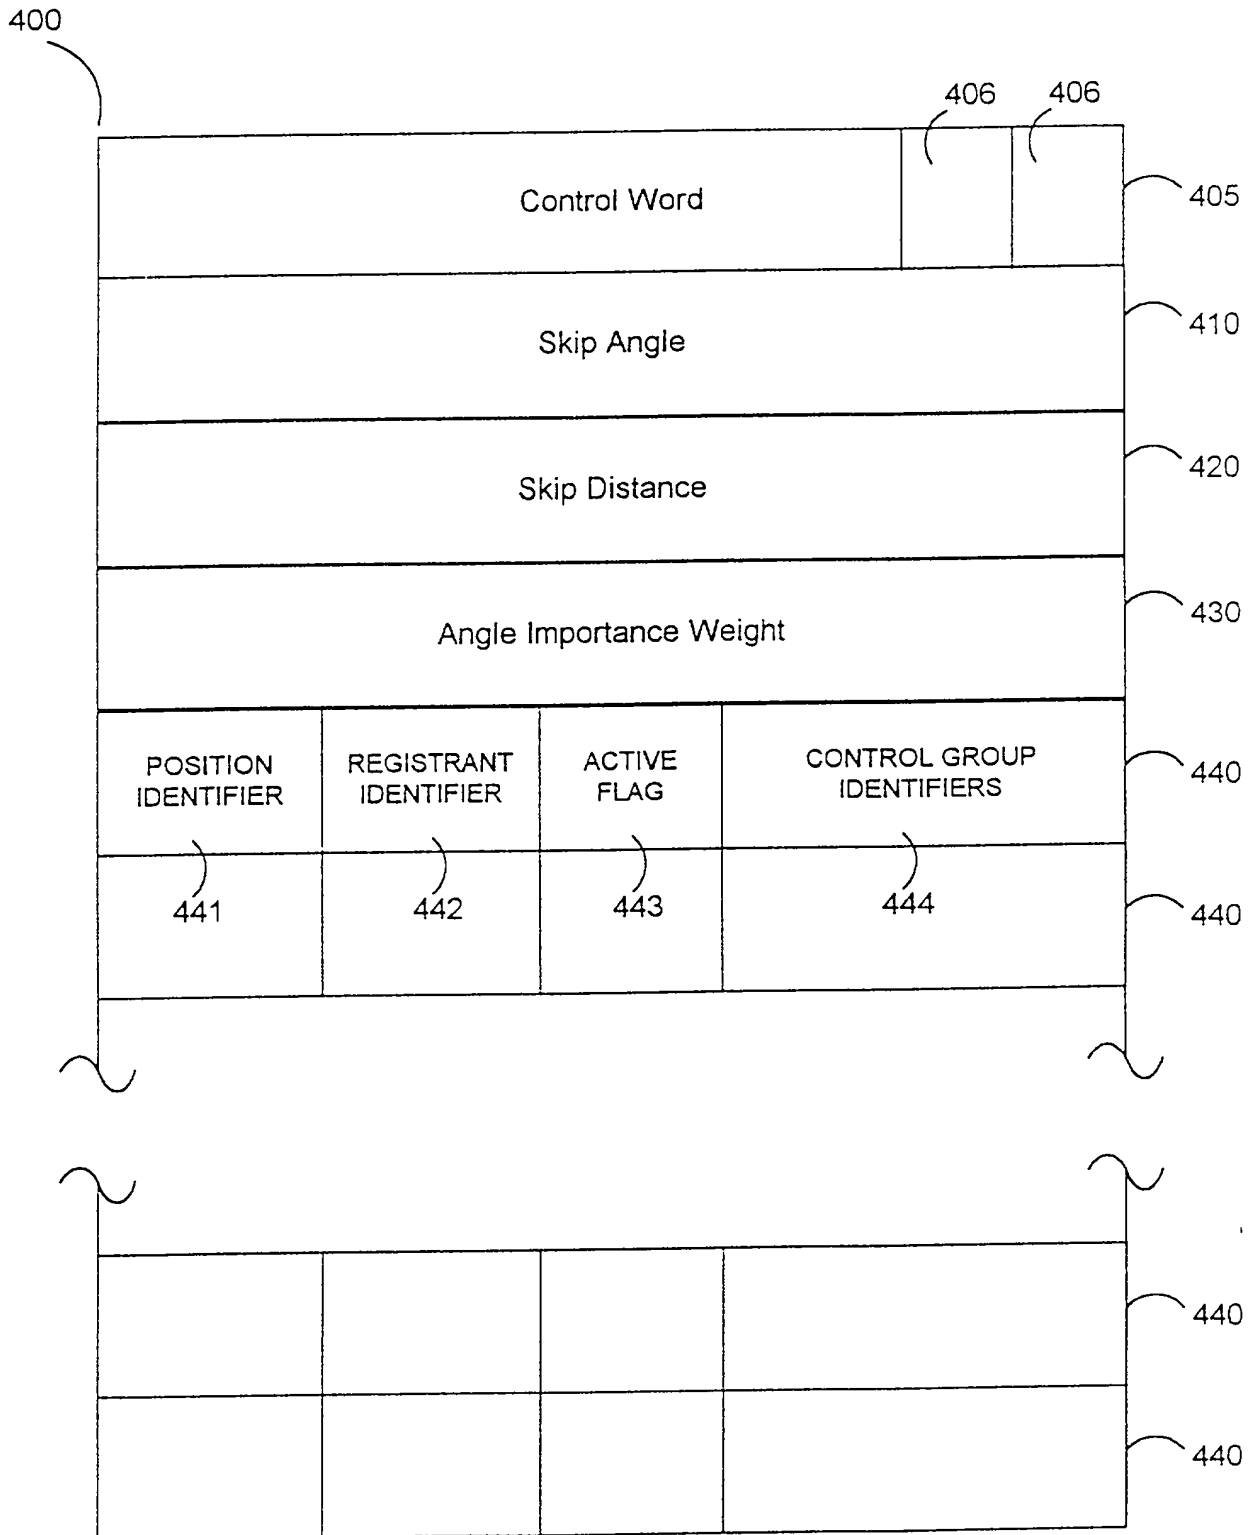


Figure 4

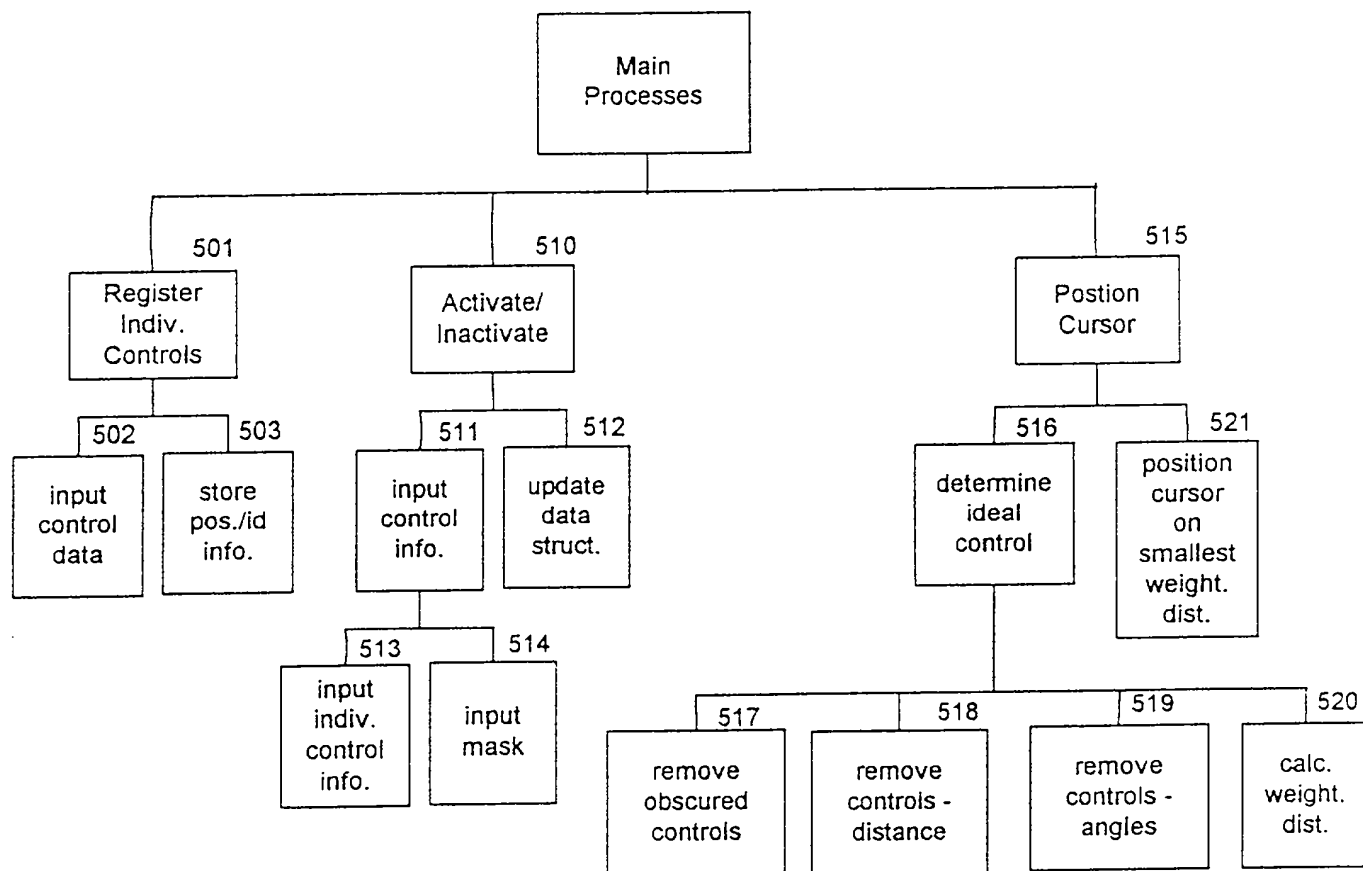


Figure 5

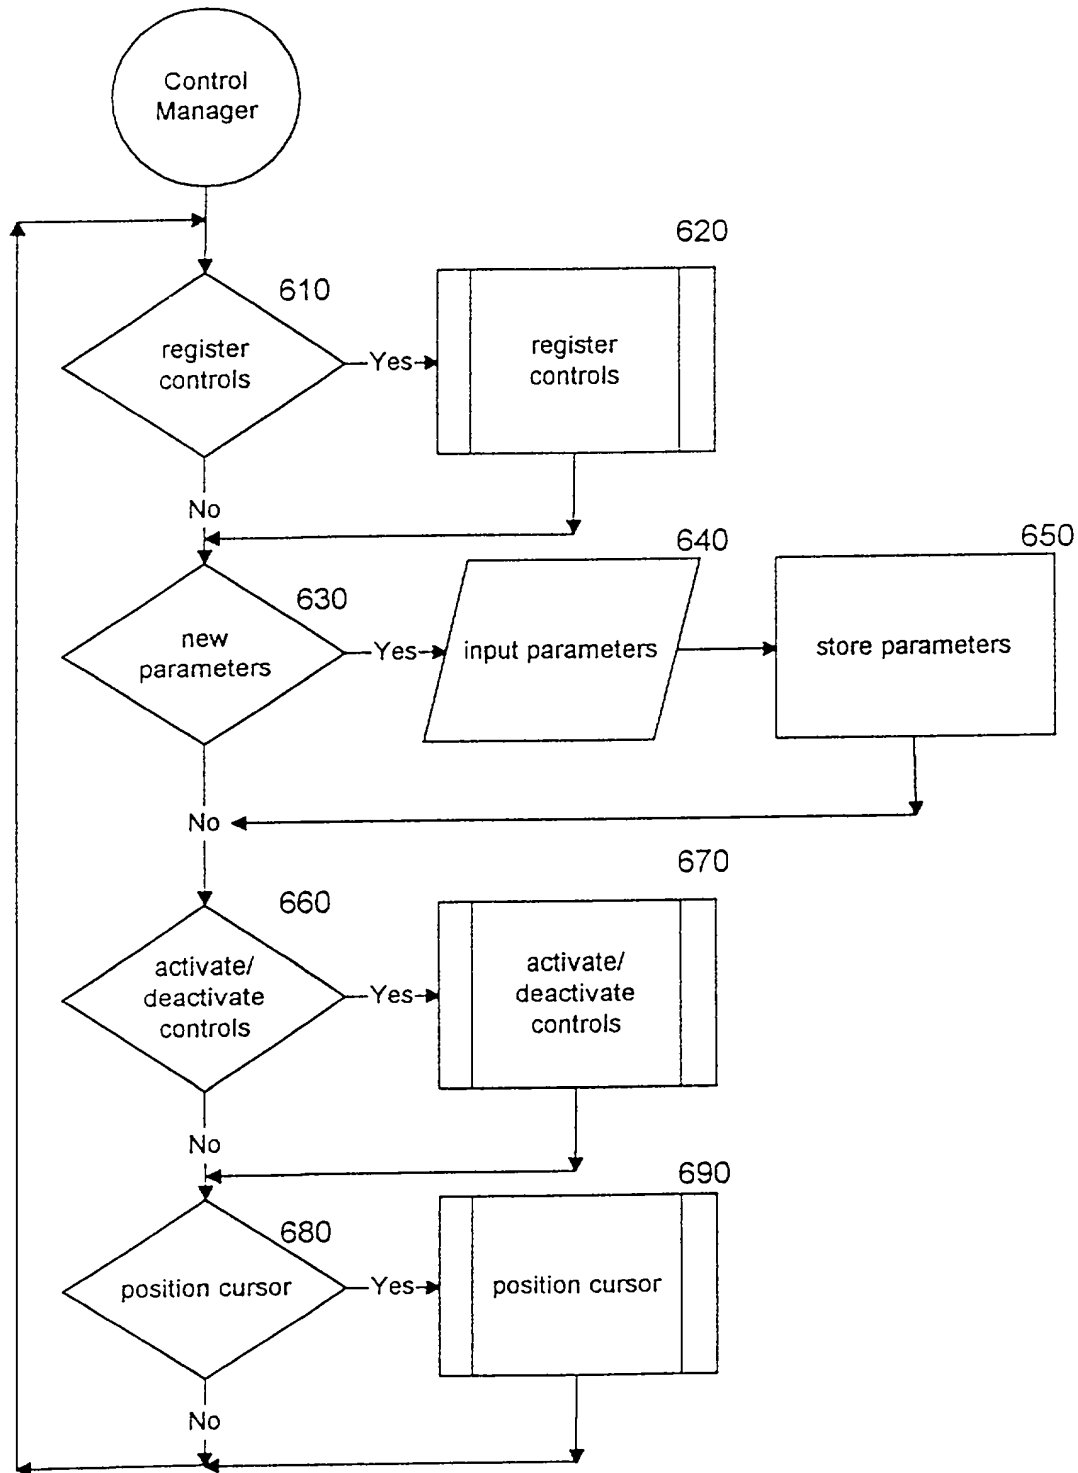


Figure 6

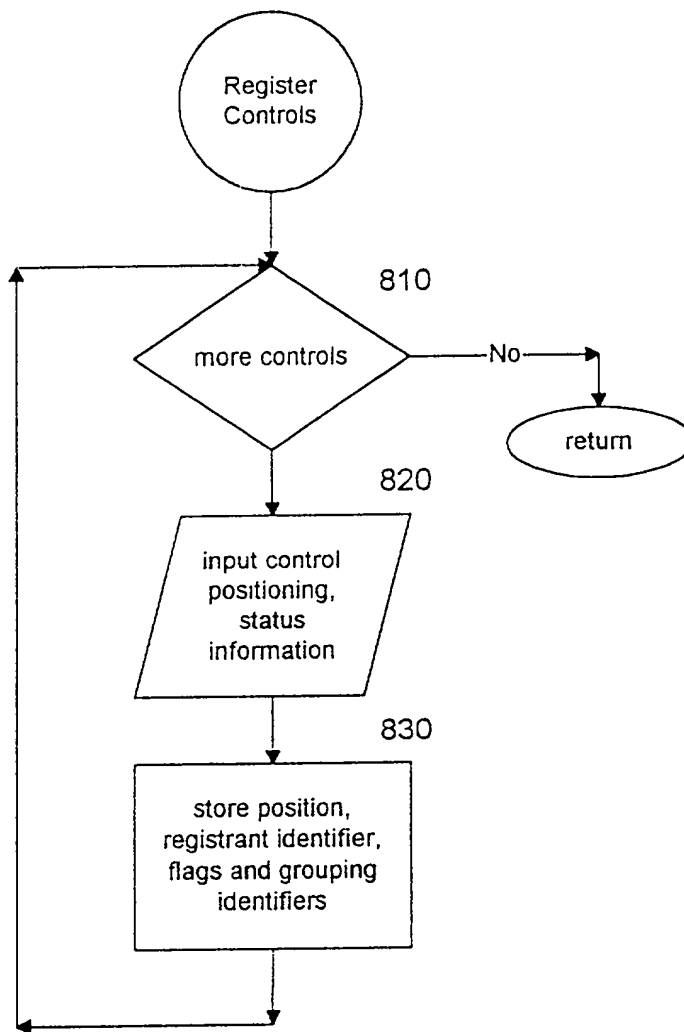


Figure 8


```

graph TD
    Start([Activate/Deactivate Controls]) --> Decision{activate/deactivate grouping}
    Decision -- Yes --> MaskWord[/mask word/]
    MaskWord --> MaskControlWord[mask control word]
    MaskControlWord --> UpdateControlStructure[update control structure]
    UpdateControlStructure --> Return([return])
    Decision -- No --> ControlIdentifier[/control identifier, activate, deactivate/]
    ControlIdentifier --> ActivateDeactivateIndividualControl[activate/deactivate individual control]
    ActivateDeactivateIndividualControl --> Return
  
```

945

1	1	1	1	0	1
---	---	---	---	---	---

Figure 9

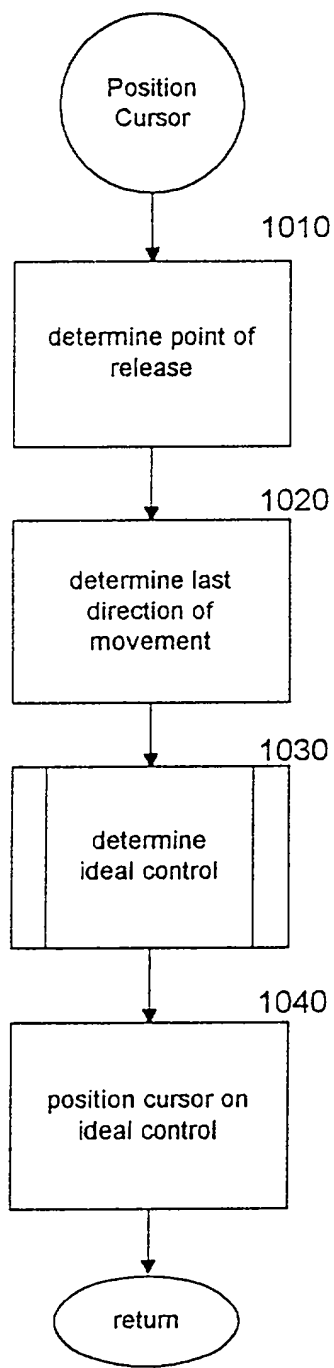


Figure 10

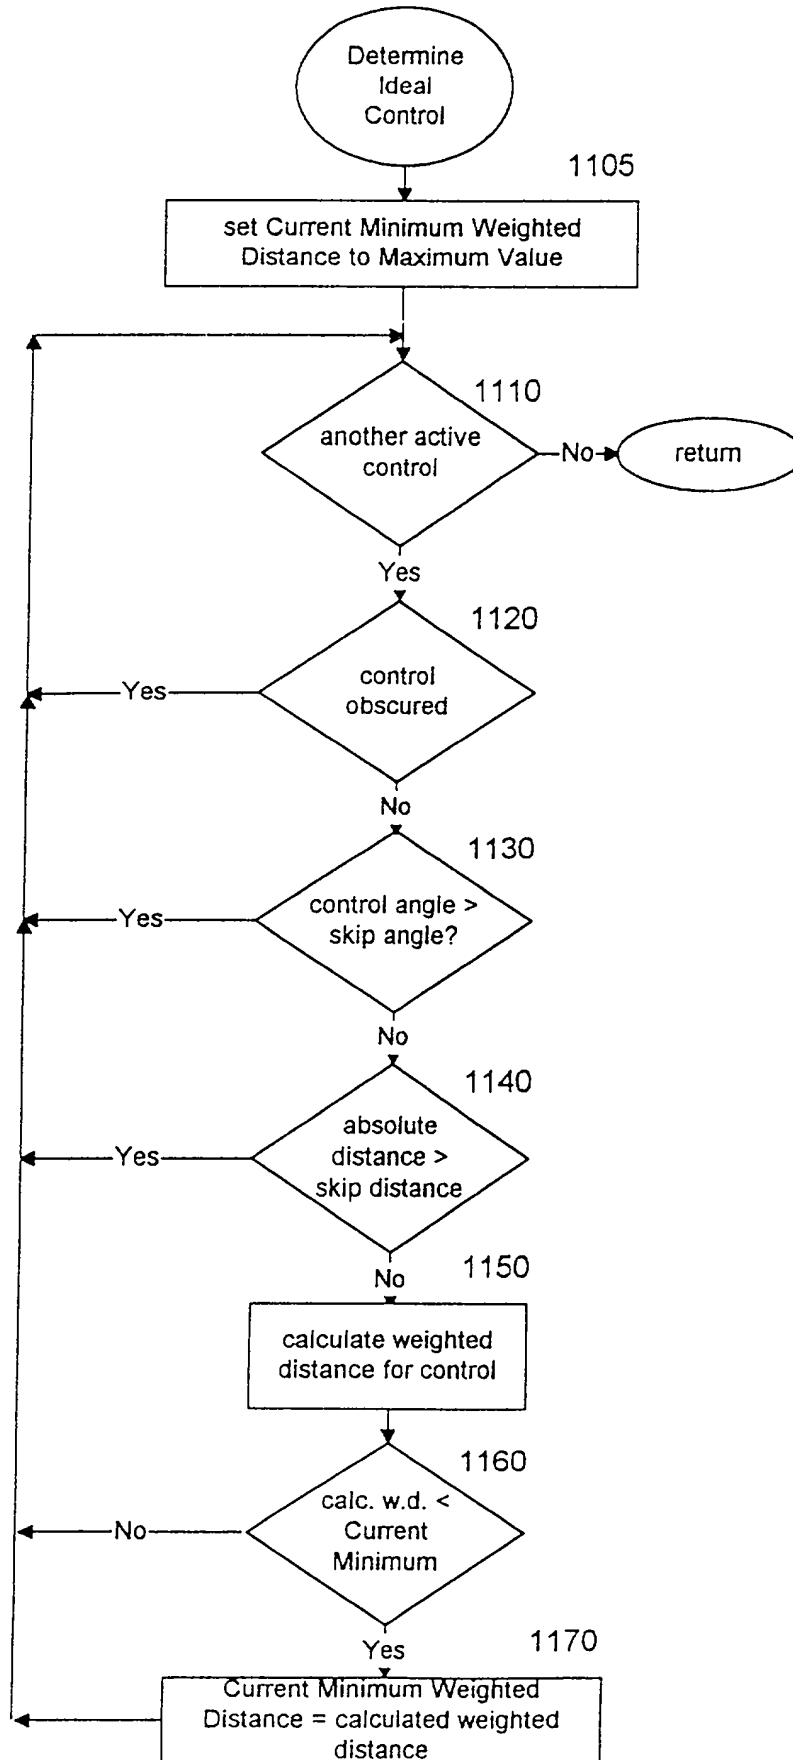


Figure 11

1 **IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

2 Application Serial No.08/209,166
 3 Filing Date3/10/1994
 4 Inventor..... Michael B. Robin
 5 Applicant Microsoft Corporation
 6 Group Art Unit2609
 7 Examiner K. Chang
 8 Attorney's Docket No. MS1-206US
 9 Title: Apparatus And Method For Automatically Positioning A Cursor On A
 10 Control

11 **POWER OF ATTORNEY AND**
 12 **REVOCATION OF PREVIOUS POWER OF ATTORNEY**

13 To: Commissioner of Patents and Trademarks,
 14 Washington, D.C. 20231

15 From: Lee & Hayes, PLLC
 16 W. 201 North River Drive, Suite 430
 17 Spokane, WA 99201
 18 (Tel. 509-324-9256; Fax 509-323-8979)

19 Microsoft Corporation of One Microsoft Way, Redmond, WA 98052-6399, a
 20 corporation organized under the laws of the State of Washington, certifies that it is
 21 assignee of the entire right, title, and interest in the patent application identified
 22 above, by virtue of an Assignment from inventor(s). A Certificate under 37 CFR
 23 3.73(b) is attached.

24 The undersigned, whose title is supplied below, is empowered to act on behalf
 25 of Microsoft Corporation.


 As assignee and owner of all rights to the above-identified application,
 Microsoft Corporation hereby (1) revokes all previous Powers of Attorney in this
 application and (2) appoints the following attorneys to prosecute this application and
 transact all future business in the Patent and Trademark Office connected with this

1 application: Lewis C. Lee, Reg. No. 34,656; Daniel L. Hayes, Reg. No. 34,618; and
2 Daniel D. Crouse, Reg. No. 32,022.

3 Send correspondence to: LEE & HAYES, PLLC, W. 201 North River Drive,
4 Suite 430, Spokane, Washington, 99201. Direct telephone calls to: Lewis C. Lee or
5 Daniel L. Hayes (509) 324-9256.

6 I hereby declare that all statements made herein of my own knowledge are
7 true, and that all statements made on information and belief are believed to be true;
8 and further, that these statements are made with the knowledge that willful false
9 statements, and the like so made, are punishable by fine or imprisonment, or both
10 under section 1001, Title 18 of the United States Code, and that such willful false
11 statements may jeopardize the validity of the application or any patent issuing
12 thereon.

13
14 Dated: 11/24/97

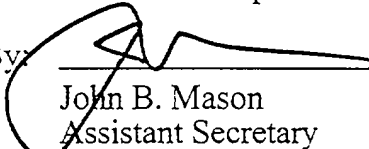15
16
17
18
19
20
21
22
23
24
25
Microsoft Corporation
By: 
John B. Mason
Assistant Secretary

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

CERTIFICATE UNDER 37 CFR 3.73(b)Applicant: Michael B. RobinApplication No.: 08/209,166 Filed: 3/10/1994Entitled: Apparatus And Method For Automatically Positioning A
Cursor On A ControlMicrosoft Corporation, a corporation,
(Name of Assignee) (Type of Assignee, e.g., corporation, partnership, university, government agency, etc.)

certifies that it is the assignee of the entire right, title and interest in the patent application identified above by virtue of either:

A. ☒ An assignment from the inventor(s) of the patent application identified above. The assignment was recorded in the Patent and Trademark Office at Reel 6921, Frame 0483, or for which a copy thereof is attached.


OR

B. ☐ A chain of title from the inventor(s), of the patent application identified above, to the current assignee as shown below:1. From: _____ To: _____
The document was recorded in the Patent and Trademark Office at
Reel _____, Frame _____, or for which a copy thereof is attached.2. From: _____ To: _____
The document was recorded in the Patent and Trademark Office at
Reel _____, Frame _____, or for which a copy thereof is attached.3. From: _____ To: _____
The document was recorded in the Patent and Trademark Office at
Reel _____, Frame _____, or for which a copy thereof is attached.☐ Additional documents in the chain of title are listed on a supplemental sheet.☐ Copies of assignments or other documents in the chain of title are attached.

The undersigned has reviewed all the documents in the chain of title of the patent application identified above and, to the best of undersigned's knowledge and belief, title is in the assignee identified above.

The undersigned (whose title is supplied below) is empowered to sign this certificate on behalf of the assignee.

I hereby declare that all statements made herein of my own knowledge are true, and that all statements made on information and belief are believed to be true; and further, that these statements are made with the knowledge that willful false statements, and the like so made, are punishable by fine or imprisonment, or both, under Section 1001, Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

11/24/97
Date
Signature
John B. MasonTyped or printed name
Assistant Secretary

Title